

NORIOTA



Intertek
ANSI/UL 197
CAN/CSA-C22.2
No. 109



Intertek
ANSI/NSF 4



NCCOH

NCCOH COUNTERTOP CONVECTION OVEN

FEATURES & BENEFITS



- **Spacious Interior Cooking Chamber:** Provides 46 x 36.8 x 34.8 cm (18.1 x 14.5 x 13.7 in) of internal space and fits four 43.5 x 31.5 cm (17.1 x 12.4 in) pans for higher-volume baking, roasting, and finishing applications.
- **Dual Convection Fans** help move heated air across multiple rack positions for more even cooking, browning, and recovery during repeated use.
- **570 °F Maximum Temperature** gives operators a wider cooking range for baking, roasting, crisping, and high-temperature finishing.
- **240 V Power Connection** requires a NEMA 6-20P plug to support 2800 W heating output and strong temperature recovery during commercial cooking.
- **120-Minute Timer** supports timed cooking cycles and helps operators manage repeatable batches during busy service periods.
- **Mechanical Thermostat Control** gives operators simple, familiar temperature control without complex programming or digital menus.
- **Interior Oven Light** improves visibility so operators can check product colour and progress without opening the door as often.
- **Drop-Down Glass Door** provides clear product visibility and convenient loading access for half-size pans and racks.
- **Four Adjustable Racks** let operators change rack positions for different product heights, batch sizes, and cooking requirements.
- **Compact Countertop Design** delivers half-size pan capacity in a countertop footprint for kitchens with limited floor space.
- **ETL Sanitation Certified** supports use in commercial foodservice environments requiring certified safety and sanitation compliance.

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

NORIOTA

NCCOH COUNTERTOP CONVECTION OVEN

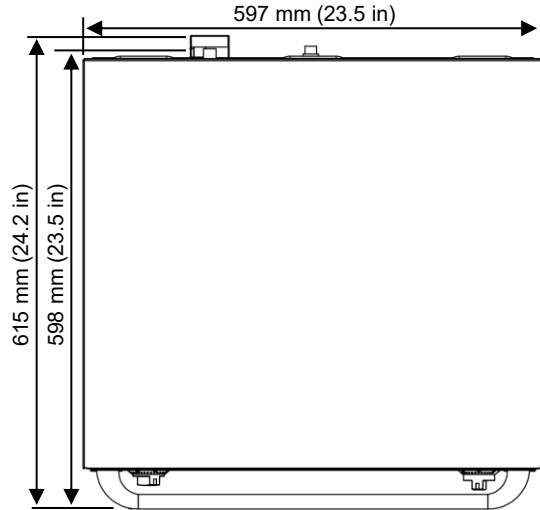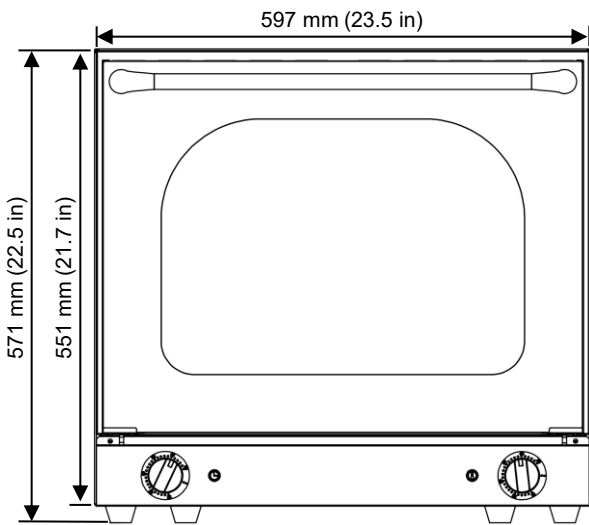

Model No.	NCCOH
Included Racks	4 adjustable racks
Internal Dimensions (W x D x H)	46 x 36.8 x 34.8 cm (18.1 x 14.5 x 13.7 in)
Usable Cooking Area (W x D x H)	43.9 x 36.8 x 34.8 cm (17.3 x 14.5 x 13.7 in)
Compatible Pan Size	43.5 x 31.5 cm (17.1 x 12.4 in)
Convection Fans	2
Interior Light	Yes
Control Type	Mechanical thermostat
Temperature Range	49 °C to 299 °C (120 °F to 570 °F)
Timer	0-120 minutes
Cabinet Construction	SUS430 stainless steel, aluminized steel, and cold rolled steel
Door Type	Drop-down glass door
Electrical	240 V / 60 Hz / 1 Ph
Rated Current	11.7 A
Power Consumption	2800 W
Plug Type	NEMA 6-20P
Required Electrical Outlet	NEMA 6-20R (240 V)
Power Cord Length	149.9 cm (59 in)
Installation Type	Countertop
Required Clearance	305 mm (12 in) top, rear, and sides
Unit Dimensions (W x D x H)	59.7 x 61.5 x 57.1 cm (23.5 x 24.2 x 22.5 in)
Unit Weight	39.9 kg (88 lb)
Shipping Dimensions (W x D x H)	64.8 x 63.2 x 63.5 cm (25.5 x 24.9 x 25 in)
Shipping Weight	42.6 kg (94 lb)
Warranty	2 years parts & labour

NORIOTA